



Feel the Difference®


Assembly Instructions

3' x 8' Table with Benches

Tools Needed: Hammer, $\frac{7}{16}$ " wrench, #2 square bit screw driver or power driver.
No drilling is required. All the necessary holes are predrilled. Bolts fit snugly in the holes.
You may need to use a hammer to drive the bolts through the holes.




Parts

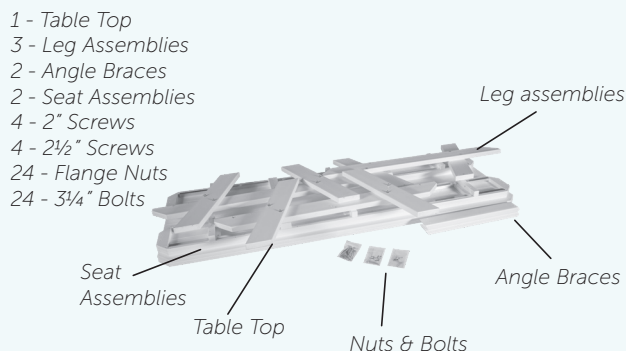

Step 3 — Install Braces

Angle Braces, 2 1/2" screws, 2" Screws

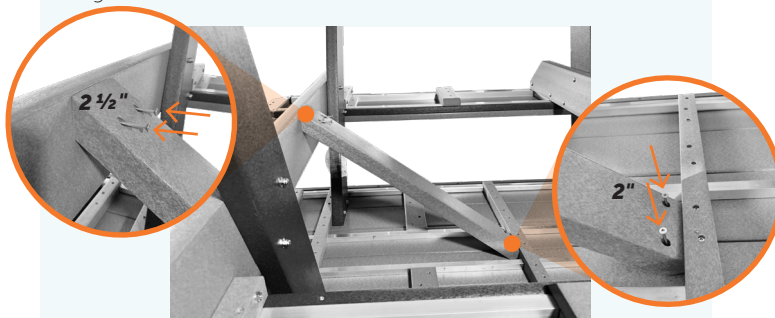


Install the angle braces. Line up the angle brace to align with the pilot holes on the underside of the table and the pilot holes on the leg assembly. Fasten with 2 1/2" screws into leg and 2" screws into table top. Repeat for the second angle brace.

Step 1 & 2 — Install Legs

Table Top, Leg Assemblies, 3 1/4" bolts, flange nuts- 3" Flathead Screws

Lay the table top upside down on a protected surface such as cardboard or blankets.

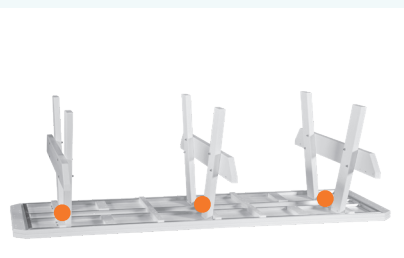

Match the number on the legs to the numbers on the table for the correct leg position. Line up the bolt holes properly. Fasten the leg assemblies to the table top using (4) 3 1/4" bolts and (4) Flange Nuts per leg assembly. Tighten the nuts securely. Tap bolts with a hammer or mallet if necessary, so that the bolt head is tight against the legs.

Step 4 — Install seats

Seat assembly, 3 1/4" bolts, Flange Nuts

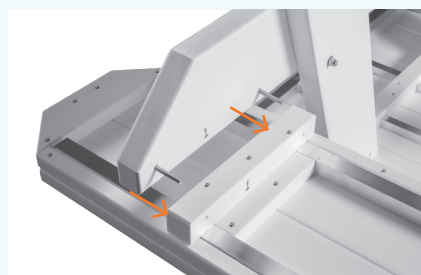


Image shown upside down

Place the table in an upright position. Match the number on the seats with the numbers on the legs for the correct seat position. Place the seat assembly on the frame as shown. Line up the bolt holes properly. Fasten securely with the bolts and nuts provided. Repeat this step for the second seat assembly

Congratulations!
Your 3' x 8' Table with
Benches is ready to enjoy!

